
POWER HARROWS







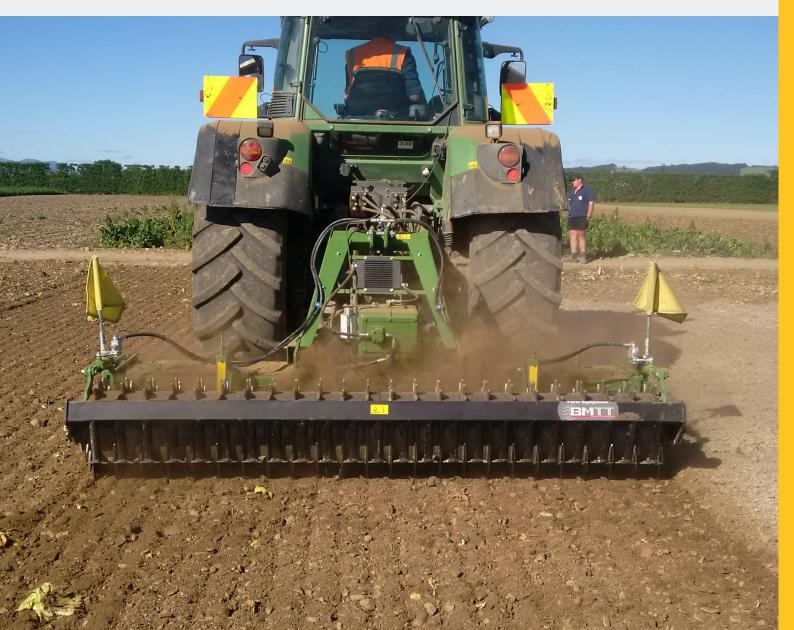

15° Rotor timing



High resistant side plates



Wide spaced bearings on rotors



Greaseable top bearings



Fully welded gearbed



Leveling bar attached to gearbed















OPTIONS:

Cage Roller

Packer Roller

400mm tines

Tungsten dipped tines

Quick fit tines

Rotor protectors



Features:

- Fully welded gearbed to give greater rigidity and ensure gears stay "true at all times"
- 15 degree rotor time to reduce horsepower demand and fuel consumption, producing a finer seedbed
- Boron steel tines
- Forged and heat treated one piece rotor shafts
- Greasable top bearings to ensure they have adequate lubrication
- 45 degree moving side plates to ensure flat finish for seedbed preparation
- Hardened gears for long life
- Two speed gearbox
- Oil cooler on gearbox
- Tine locking counter plates
- Rear levelling bar with winder height control and indicator
- Hydraulic depth control
- Cam clutch

			44	•	7
	cm	cm	HP	kg*	Nr
MAXI 300	305	300	140 - 250	1490	24
MAXI 350	355	350	160 - 250	1640	28
MAXI 400	405	400	180 - 250	1790	32
MAXI 450	455	450	200 - 250	1940	36

*weight includes packer roller

EMAIL US FOR MORE INFO

sales@farmgard.co.nz

sales@farmgard.com.au