

RECESSED AXLE

10,215 - 13,500 L

The Recess range has an extremely low centre of gravity because of the folded chassis construction that integrates the axle into the chassis. All Abbey Recess tankers are able to fit any of the slurry spreading attachments available.





Inverted splash plate




Parabolic leaf sprung drawbar



Pressed dome ends



Double trap system

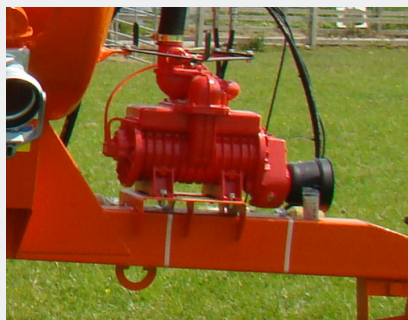

MEC 9,000 l/min ballast pump



Recessed axle



ABBEY
MACHINERY
since 1947

Features:

- Full length chassis with 4 point welding
- Recessed axle (recessed into chassis) 150 x 150 ADR commercial
- Parabolic leaf spring drawbar (weight sensing)
- 10 mm box section drawbar
- Replaceable, greasable wear bushes on drawbar pivots
- 6 mm EN 42 high carbon steel
- Inverted splash plate for low and even spread
- Double trap system to prevent overfilling
- Pressed dome ends for extra strength
- Internally welded tank
- Internal baffles
- Large recessed flotation tyres (28.1 R 26/30.5 R 32)
- Front sight tube and rear sight glass
- Hydraulic brakes
- Rear brackets to retro fit applicator



OPTIONS:

Galvanising
Autofill
Turbo filler
11,000 l/min pump
13,500 l/min pump
Hydraulic drive pump
Top hatch
Mud guards
Extra hosing



	Litres	HP	kg
AB 2250 R	10,215	100 - 450	3,700
AB 2500 R	11,350	125 - 450	4,000
AB 2750 R	12,500	140 - 450	4,580
AB 3000 R	13,500	150 - 450	4,680



CALL FARMGARD 24 HOURS
0800 FARMGARD - NZ
1800 FARMGARD - AU



EMAIL US FOR MORE INFO
sales@farmgard.co.nz
sales@farmgard.com.au



DOWNLOAD A FREE INFO PACK OR BROCHURE
farmgard.co.nz
farmgard.com.au